

Anneaux de levage femelle en Inox estampé M16 CMU:1500KG



Références du produit

Reference: -

EAN13: -

UPC: -


Description du produit

Caractéristiques

CMU (kg): 1500

Taraudage: M16

Images

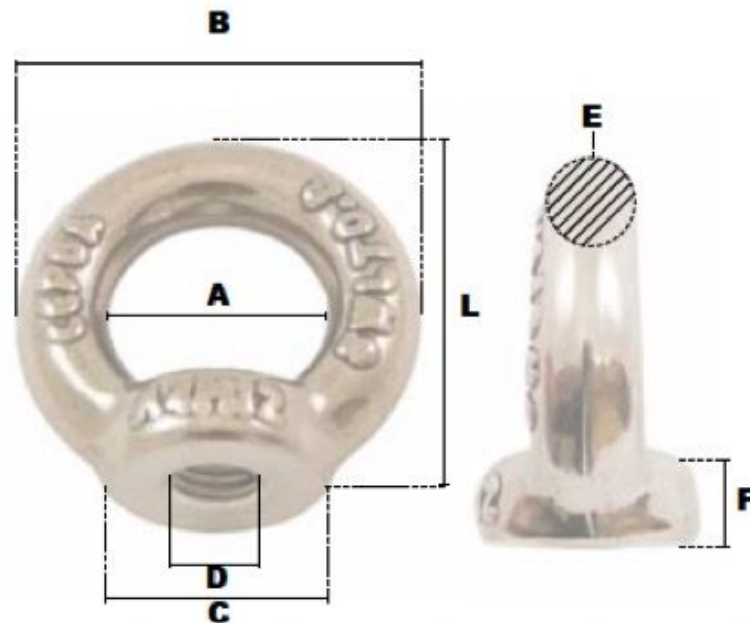

<i>D</i>	<i>CMU</i>	<i>A</i>	<i>B</i>	<i>C</i>	<i>E</i>	<i>F</i>	<i>L</i>	<i>pois le %</i>
	<i>(kg)</i>	<i>(mm)</i>	<i>(mm)</i>	<i>(mm)</i>	<i>(mm)</i>	<i>(mm)</i>	<i>(mm)</i>	<i>(kg)</i>
M6	180	20	36	20	8	8,5	36	5,50
M8	300	20	36	20	8	8,5	36	5,00
M10	500	25	45	25	10	10	45	9,00
M12	800	30	54	30	12	11	53	15,50
M14	1 100	30	54	30	12	11	53	16,50
M16	1 500	35	63	35	14	13	62	25,00
M20	2 400	40	72	40	16	16	71	36,00
M24	3 600	50	90	50	20	20	90	72,00