

# Anneaux de levage femelle en acier zingué estampé M6 CMU:90KG



## Références du produit

Reference: -

EAN13: -

UPC: -


## Description du produit

## Caractéristiques

CMU (kg): 90

Taraudage: M6

## Images

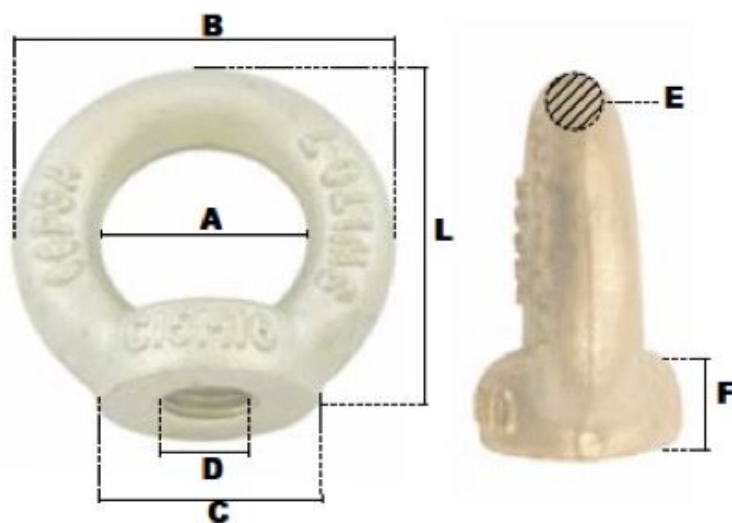

<i>D</i>	<i>CMU</i>	<i>CMU à 45°</i>	<i>A</i>	<i>B</i>	<i>C</i>	<i>E</i>	<i>F</i>	<i>L</i>	<i>poids le %</i>
	(kg)	(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
M6	90	60	20	36	20	8	8,5	36	6,00
M8	140	100	20	36	20	8	8,5	36	6,00
M10	230	170	25	45	25	10	10	45	10,00
M12	340	240	30	54	30	12	11	53	16,00
M14	500	350	30	54	30	12	11	53	15,00
M16	700	500	35	63	35	14	13	62	24,00
M18	930	650	35	63	35	14	13	62	24,00
M20	1 200	860	40	72	40	16	16	71	36,00